
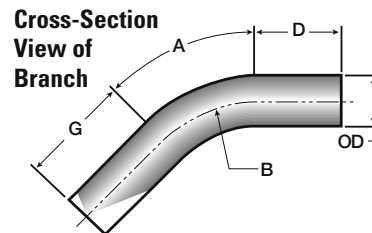


## Parallel Wyes *Bold Type Designates a Stock Item*

OD	GAUGE (Wall Thickness) & MATERIAL	DEGREE	PRODUCT ID
1-1/2"	<b>16A, 16S</b>	45	PWYE1501
1-3/4"	<b>16A, 16S</b>	45	PWYE1751
2"	<b>16A, 16S</b>	45	PWYE2001
2-1/4"	<b>16A, 16S</b>	45	PWYE2251
2-1/2"	<b>16A, 16S</b>	45	PWYE2501
3"	<b>16A, 16S</b>	45	PWYE3001
4"	<b>16A, 16S</b>	45	PWYE4001

### Branch dimensions

OD	A	B	C	D	E	F	G
1.5	45	4	19.94	6	6	6	6.81
2	45	5	20.5	6	6	6	6.44
2.5	45	6	21	6	6	6	6
3	45	7.5	21.75	6	6	6	5.38
4	45	10	29	8	8	8	7.19

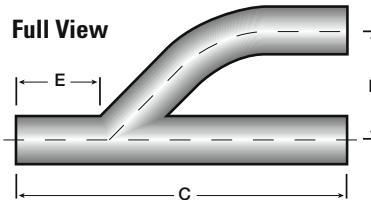

To determine your part number when ordering:

Use **Gauge** plus **Product ID** plus **Material type**.



### Material type

A = Aluminum  
C = Carbon  
S = Stainless

## Parallel Wye Specifications

- 1-1/2" through 4" OD
- Wall Thickness: 16 Gauge
- Aluminum & Stainless
- 30 Degree available upon request!

**Typically used in single line pneumatic conveying systems to allow drops to multiple stations.**

### TERMINOLOGY

**CLR** = Center Line Radius  
**ERW** = Electric Welded Resistance  
**FNPT** = Female National Pipe Thread  
**ID** = Inside Diameter  
**MNPT** = Male National Pipe Thread  
**NPS** = Nominal Pipe Size  
**OD** = Outside Diameter  
**SCH** = Schedule